## NOTES


- 1. WHEN THIS DRAWING IS USED AS AN ORDER SUBMITTAL, IT MUST BE SIGNED, AND AN ORDER SUBMITTAL FORM MUST BE INCLUDED.
- 2. 30 YEAR WARRANTY COVERAGE SEE INTERCEPTOR LIMITED WARRANTY FOR DETAILS
- 3. OPTIONAL ACCESSORIES (LEVEL ALARMS) ARE ALSO AVAILABLE.
- 4. ALL UPC LABELED GREASE INTERCEPTORS MUST SHIP FROM THE ANAHEIM FACILITY.

## DESIGN PARAMETERS


- 1. TANK SIZE: 4' DIA SINGLE-WALL, 48 1/2" O.D.
- 2. NOMINAL TANK CAPACITY: 1,000 GALLONS.
- 3. NOMINAL TANK WEIGHT: 1.100 LBS.
- 4. INVERT DIMENSION FROM GRADE.
- 5. CAPACITY AT FLOW LINE: 838 GALLONS.
- 6. MAX GREASE CAPACITY: 495 GALLONS.
- 7. MAX SOLIDS CAPACITY: 257 GALLONS.

## **APPROVAL**

THE UNDERSIGNED ACKNOWLEDGES AND AGREES TO THE USE AND DESIGN PARAMETERS AS DETAILED ON THIS DRAWING AND IN THE ACCOMPANYING ORDER SUBMITTAL FORM AND HEREBY APPROVES FABRICATION.

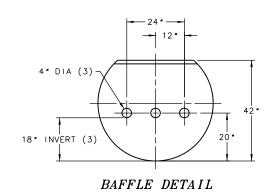



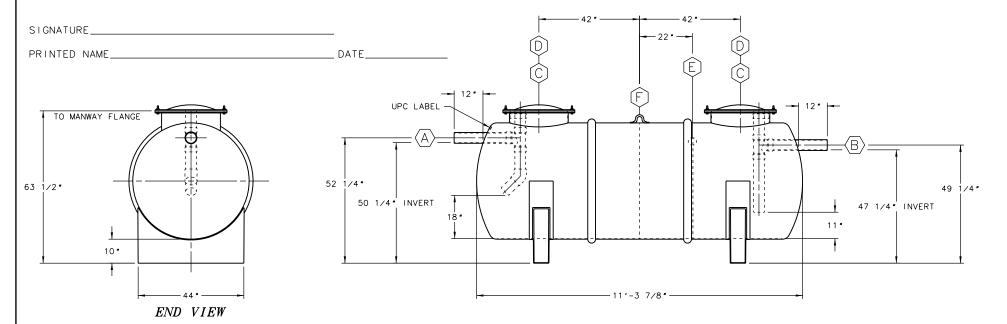

ITEM	QTY	DESCRIPTION
A	1	4 "DIA SCH 40 PVC INLET PIPE WITH INTERNAL SANITARY TEE, PIPES & 45° ELBOW
B	1	4 "DIA SCH 40 PVC OUTLET PIPE WITH INTERNAL SANITARY TEE & PIPES
©	2	24 "DIA MANWAY WITH FRP COVER (30" OD FLANGE)
0	2	STUD BOLT RING FOR 24"DIA MANWAYS (30" OD FLANGE)
Œ	1	42" HIGH PLATE BAFFLE WITH 3-4"DIA HOLES (18" INVERT)
F	1	LIFTING LUG

## **ZCL® XERXES®**

TITLE

MODEL GI-4-825-UPC-AST GREASE INTERCEPTOR

DATE 1-17 DR. NO.S11-956.00
INDUSTRY TYPE: M210 PLUMBING ENGINEERED SOLUTIONS