


NOTE:

- 1 TANK USAGE: GREASE INTERCEPTOR.
- 2 INVERT DIMENSIONS FROM TANK I.D.
- 3 UPC LABEL IS LAMINATED ONTO INLET SIDE OF TANK.
- 4 OPTIONAL PREFABRICATED DEADMEN SHOWN.

 IF DEADMEN ARE ADDED TO THE ORDER,

 ACCOMMODATIONS MAY BE REQUIRED TO

 SECURE THE STRAPS TO THE DEADMEN.

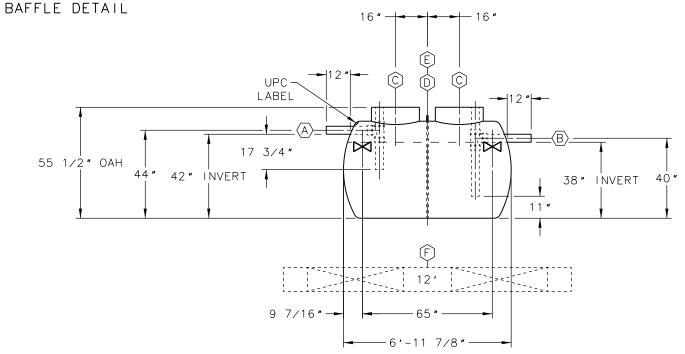

ITEM	QTY	DESCRIPTION
A	1	4 "DIA SCH 40 PVC INLET PIPE WITH INTERNAL SANITARY TEE & PIPES
B	1	4 "DIA SCH 40 PVC OUTLET PIPE WITH INTERNAL SANITARY TEE & PIPES
(C)	2	RISER PIPE, FOR 24"(NOMINAL) ACCESS OPENING
0	1	FULL PLATE BAFFLE WITH 3 - 4"DIA HOLES & 1 - 4"DIA VENT HOLE
Ê	1	LIFTING LUG
F	2	12' PREFABRICATED CONCRETE DEADMAN (OPTIONAL)
\bowtie	2	HOLD DOWN STRAP LOCATION

RATED CAPACITY - 517 GALLONS

XERXES®

CAP. 600 GALLONS
IAPMO - ANSI Z1001

DATE 1-12 DR. NO.S11-639.00