
NOTES


- 1. WHEN THIS DRAWING IS USED AS AN ORDER SUBMITTAL, IT MUST BE SIGNED, AND AN ORDER SUBMITTAL FORM MUST BE INCLUDED.
- 2. 30 YEAR WARRANTY COVERAGE SEE INTERCEPTOR LIMITED WARRANTY FOR DETAILS
- 3. OPTIONAL ACCESSORIES (LEVEL ALARMS, EXTENSION RISERS, STREET BOXES) ARE ALSO AVAILABLE.
- 4. ALL UPC LABELED GREASE INTERCEPTORS MUST SHIP FROM THE ANAHEIM FACILITY.


DESIGN PARAMETERS


- 1. TANK SIZE: 4' DIA SINGLE-WALL, 48 1/2" O.D.
- 2. NOMINAL TANK CAPACITY: 1,500 GALLONS.
- 3. NOMINAL TANK WEIGHT: 1,500 LBS.
- 4. INVERT DIMENSION FROM TANK I.D.
- 5. CAPACITY AT FLOW LINE: 1254 GALLONS.
- 6. MAX GREASE CAPACITY: 739 GALLONS.
- 7. MAX SOLIDS CAPACITY: 387 GALLONS.

APPROVAL

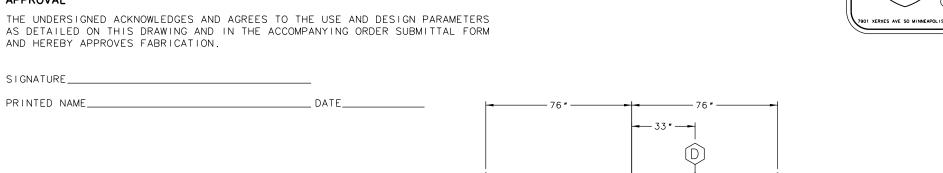





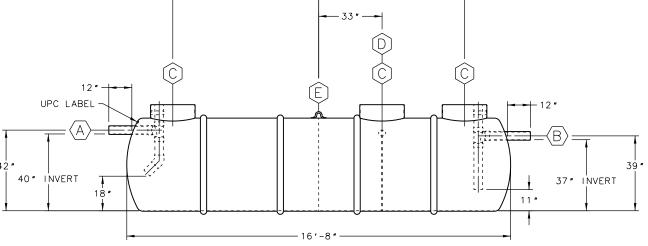

ITEM	QTY	DESCRIPTION
A	1	4"DIA SCH 40 PVC INLET PIPE WITH INTERNAL SANITARY TEE, PIPES & 45° ELBOW
B	1	4 "DIA SCH 40 PVC OUTLET PIPE WITH INTERNAL SANITARY TEE & PIPES
©	3	RISER PIPE, 23 3/8" O.D., FOR 24"(NOMINAL) ACCESS OPENING
0	1	42" HIGH PLATE BAFFLE WITH 3-4"DIA HOLES (18" INVERT)
Ê	1	LIFTING LUG

ZCL[®] XERXES[®]

4-XGI-1250

th/Year Manufactured__/20.

(Installed per Manufactures Guidelines

nal Working Volume 1250 Gal

TITLE

MODEL GI-4-1250-UPC GREASE INTERCEPTOR

DATE 1-17 DR. NO.S11-913.00
INDUSTRY TYPE: M210 PLUMBING ENGINEERED SOLUTIONS